

Quick Cable Reserves The Right to Alter Product Types, Their Technical Data, Dimensions, Style And Accessories Without Prior Notification.


**Barrel Prefilled With Rosin & Solder**

**I.D. Sized For 1 Ga. & 2 Ga. [40mm<sup>2</sup>] & [32mm<sup>2</sup>] Stranded Cable, 7/8" Min. depth**

**35/64" O.D. [14mm] (May Vary Due To Shrinkage)**

**Bolt Hole Sized For 5/16" [M8] Bolt**

**17/32" [13.5mm]**

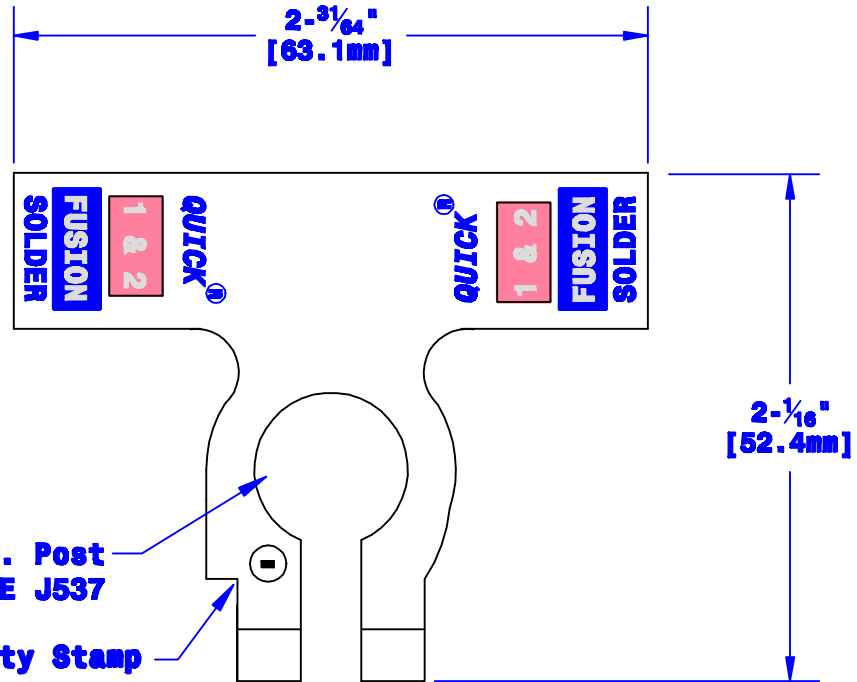

**Sized For Neg. Post Per SAE J537**

**Polarity Stamp**

<b>Property of</b> <b>QUICKCABLE®</b> 3700 Quick Drive Franksville, WI 53126 U.S.A. www.quickcable.com	<b>TITLE</b> Die Cast Flag, Neg. 1 Ga. [40mm <sup>2</sup> ] and 2 Ga. [32mm <sup>2</sup> ]
	<b>PART #</b> <b>436301N</b>

**Confidential and Proprietary Information**

					Drawn By <b>Jim H</b>	Date <b>03-29-07</b>	Checked By <b>Mike E</b>	Scale <b>None</b>
<b>A</b>	<b>08-03-12</b>	<b>2459</b>	<b>JMH</b>	<b>Redrawn; printing info updated</b>	Tolerances, unless otherwise noted <b>Dimensions are reference only</b>			
<b>Rev</b>	<b>Date</b>	<b>ECH#</b>	<b>By</b>	<b>Description</b>				

<b>Material &amp; Treatment</b> High Conductivity Copper Alloy Tin Plated	<b>Drawing #</b> <b>436301N-Info</b>	<b>REV</b> <b>A</b>
<b>Sheet 1 of 1</b>		