

QUICKLINK®

2/0 GAUGE CABLES & JUMPERS

- Made for truck, farm, construction, automotive and similar equipment
- 2/0 gauge fine-stranded copper conductor for maximum conductivity and flexibility
- Meets or exceeds SAE and OEM specifications
- Premium quality synthetic rubber insulated welding cable enables easy routing and cold weather flexibility
- Connection sealed with MagnaTube™ heat-shrink
- Temperature range: 221°F (105°C) to -58°F (-50°C) Welding Cable



FOR STUD BATTERIES - BATTERY TO GROUND STARTER: LUG TO LUG

LENGTH	3/8" - 3/8" (10 MM - 10 MM)	3/8" - 1/2" (10 MM - 13 MM)
10"	7910F	7910H
15"	7915F	7915H
20"	7920F	7920H
25"	7925F	7925H
30"	7930F	7930H
35"	7935F	7935H
40"	7940F	7940H
45"	7945F	7945H

QUICKLINKS® BETWEEN BATTERIES



CENTER TO CENTER	NEGATIVE	POSITIVE
8-1/2"	7625N	7626P
17"	7630N	7631P

FOR POST BATTERIES - BATTERY TO GROUND STARTER: CLAMP TO LUG

LENGTH	NEGATIVE	POSITIVE
10"	7910N	7910P
15"	7915N	7915P
20"	7920N	7920P
25"	7925N	7925P
30"	7930N	7930P
35"	7935N	7935P
40"	7940N	7940P
45"	7945N	7945P

**MEETS OR
EXCEEDS SAE
AND OEM
SPECIFICATIONS**

**WE STOCK
WHAT YOU
NEED!**

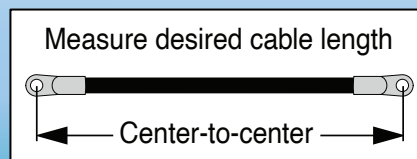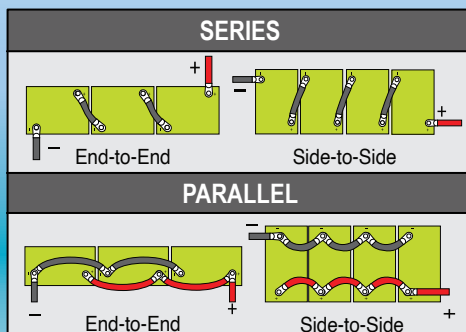

QUICKCABLE®

Follow us on



sales@quickcable.com
3700 Quick Drive, Franksville, WI 53126 U.S.A.
Phone 1-800-558-8667 • Fax 1-800-733-8611

cdnsales@quickcable.com
6395 Kestrel Rd., Mississauga, Ontario L5T1Z5 Canada
Phone 1-800-728-1742 • Fax 905-362-1614