




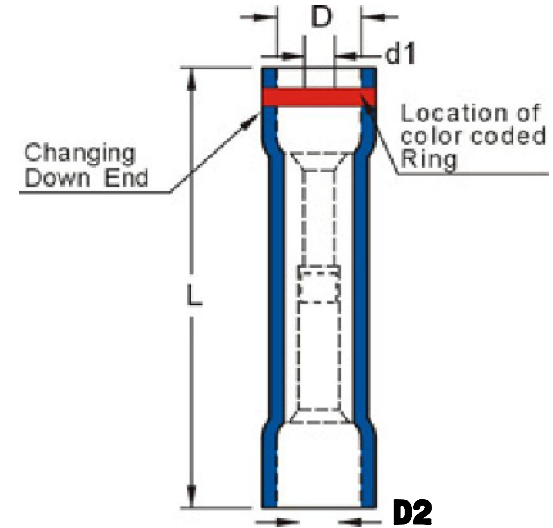
Quick Cable Reserves The Right to Alter Product Types, Their Technical Data, Dimensions, Style And Accessories without Prior Notification.

P/N	Gage	L	D	d1	D2
160183	16-14 / 18-22	.965	.177	.067	0.091
160283	12-10 / 16-14	1.220	.248	.091	0.134
160483	8 / 12-10	1.406	.335	.134	0.177

Maximum Electrical Rating: 75°C 600 Volts Max
Connector Material: Copper
Insulation Material: PVC
Insulation Color:
 16-14 / 18-22 A.W.G.: Blue W/Red Ring 
 12-10 / 16-14 A.W.G.: Yellow W/Blue Ring 
 8 / 12-10 A.W.G.: Red W/Yellow Ring 

Maximum Electric Current:

A.W.G.	22	20	18	16	14	12	10	8	6
AMP.	9	12	17	18	30	35	50	70	95



Property of QUICKCABLE® 3700 Quick Drive Franksville, WI 53126 U.S.A. www.quickcable.com		TITLE Butt Connector, Stepdown PVC Insulation	
		PART # 160183-160683	
Confidential and Proprietary Information			
Material & Treatment		Drawing # C1010-Info	
		REV Sheet 1 of 1	

Rev	Date	ECH#	By	Description

Drawn By Jim H	Date 12-22-11	Checked By Mike E	Scale None
Tolerances, unless otherwise noted Dimensions are reference only			